


Approved Nail / Cleat Fastening Systems

Due to the hardness of bamboo flooring, floor stapling systems are not suitable for use when installing Teragren Bamboo. Staples tend to bend and fold up in use, due to hardness of Teragren Bamboo Floors. 18 to 20 gauge cleat systems with an 1 ½" leg are the only fasteners approved for nail down installation of Teragren Bamboo Floors.

Air Pressure Settings

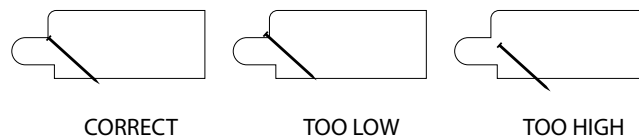

POWER NAIL PNEUMATIC MODEL 50P Flex

18 gauge cleat - 1 ½" leg.

Use 12 oz. rubber hammer to activate gun. Gun adjusts to nail 12mm, 14mm, 15mm. Other versions of Pneumatic Model 50 are also acceptable.

POWER NAIL PNEUMATIC MODEL 200

20 gauge cleat - 1 ½" leg. Use 12 oz. rubber hammer to activate gun. Gun adjusts to nail 12mm, 14mm, 15mm.

PRIMATEC PNEUMATIC MODEL 550A

18 gauge cleat - 1 ½" leg.

Use 12 oz. rubber hammer to activate gun. Gun adjusts to nail 12mm, 14mm, 15mm.

PORTA NAIL PNEUMATIC MODEL 418A

18 gauge cleat - 1 ½" leg. Use 12 oz. rubber hammer to activate gun. Gun adjusts to nail 12mm, 14mm, 15mm.

Follow all gun manufacturer's guidelines for psi settings. Some adjustment to psi in the field is generally necessary, to ensure cleat seats properly in the pocket. Improper placement of the cleat can compromise the performance of the floor.